



AQUILA

Quadrifilar Helical GNSS Antenna (No Enclosure)

CZ0068-6G01

Key Features

- Multi constellation reception for GPS, GLONASS, BDS, and Galileo
- Wideband support for L1 L2 L5, E1 E5 E6, B1 B2 B3 draw
- RHCP polarization with low axial ratio
- Integrated low noise amplifier with 33 dB typical gain
- DC input range f rom 3 to 15 V
- Compact helix structure for stable phase center performance
- SMA male connector
- Operating temperature f rom minus 45°C to plus 85°C

1 Introduction

AQUILA is a high-performance active Quadrifilar Helical Antenna (QHA) designed for applications that require reliable, multi band precision. Its compact 55.6 mm form integrates a tightly engineered RHCP helix, providing stable phase characteristics and dependable gain across all major global navigation satellite systems. AQUILA supports GPS L1 L2 L5, GLONASS L1 L2 L3, BDS B1 B2 B3, and Galileo E1 E5 E6, ensuring robust performance in environments where signal conditions vary.

An integrated low noise amplifier enhances sensitivity and improves signal acquisition, delivering consistent results where weaker antennas may lose lock. When compared with competing helical GNSS designs from established brands, AQUILA demonstrates wideband capability, strong RHCP purity, and stable electrical performance across all supported bands.

Features

- ◆ Multi constellation reception for GPS, GLONASS, BDS, and Galileo
- ◆ Wideband support for L1 L2 L5, E1 E5 E6, B1 B2 B3 draw
- ◆ RHCP polarization with low axial ratio
- ◆ Integrated low noise amplifier with 33 dB typical gain
- ◆ DC input range from 3 to 15 V
- ◆ Compact helix structure for stable phase center performance
- ◆ SMA male connector
- ◆ Operating temperature from minus 45°C to plus 85°C

Applications

- ◆ High precision GNSS receivers
- ◆ Survey and mapping equipment
- ◆ Precision agriculture systems
- ◆ Industrial timing and synchronization
- ◆ UAV, robotics, and autonomous platforms
- ◆ Asset tracking and fleet positioning

2 Mechanical Specifications

Part Number	SZA-N-5G49
Name	AQUILA (No enclosure)
Dimensions (mm)	54.0 x 24.0 Ø
Weight	< 30 g
Antenna Type	Quadrifilar Helical GNSS Antenna
Connector*	SMA Male
Housing	None

Alternate cable length and connectors available on request

3 Electrical / RF Specifications

Band	Frequency Range (MHz)	Peak Gain (dBic)	Out-ofband Rejection	Axial Ratio	Impedance
L5, E5a, E5b, E5, B2a, B2b, B2, L2, L2, E6	1164-1278	>2.00	>35	≤1.5	50 ohm
L1, E1, B1, G1, L band (SBAS), B1C, E2-L1-E	1525-1615		>40		


4 LNA Specifications

Frequency Range (MHz)	DC Voltage (V)	Current (mA) Typical	Gain (dB) Typical	VSWR	Noise Figure (dB)
1164-1278	3 - 15	20	33	≤2.00	≤2.00
1525-1615					

5 Environmental

Operational Temperature	-45 to +85°C
Storage Temperature	-45 to +85°C
Relative Humidity (Storage)	65±20% RH
IP Rating	IP67
RoHS and REACH compliant	Yes

3 Mechanical Drawing

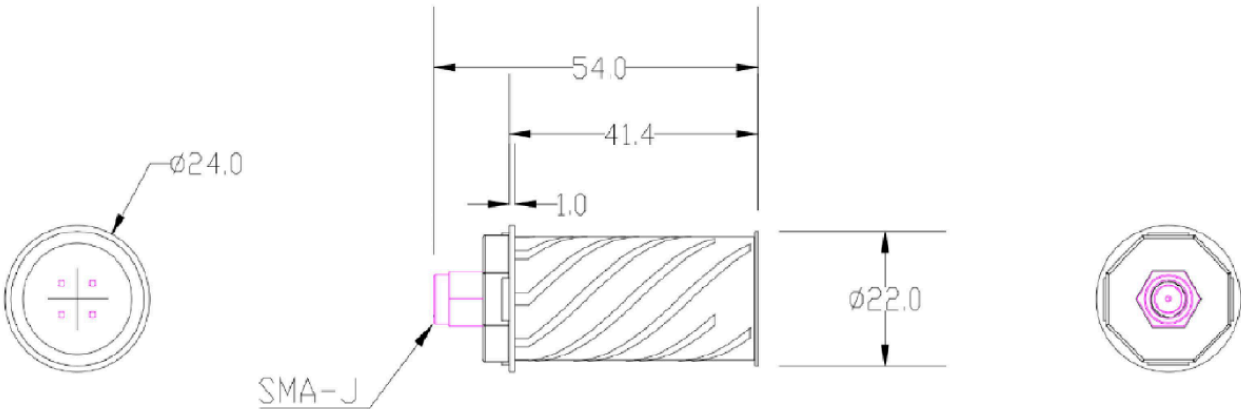


- Note:
- 1.Frequency Range:1525-1615MHz&1164-1278MHz;
GPS: L1/L2/L5 ;
GLONASS: L1/L2/L3 ;
BDS: B1/B2/B3 ;
Galileo: E1/E5/E6 ;
Impedance:50Ω
LNA Gain:33±2 dB
VSWR≤2.0
DC Voltage:3~15V
 - 2.Working temperature:-35°C~+75°C
 - 4.These Products are in conformity with ROHS 2.0
 - 5.Strict sizes are marked with "*" and "()" for reference

			UNIT
			mm
3	Connector	SMA, Male	1
2	O-Ring	Rubber, Black	1
1	Antenna-Cover	PC+ABS, Black	1
NO	DESCRIPTION		Q'TY

4 Phase Centre Reference

The antenna phase centre is located on the mechanical axis as defined in the associated mechanical drawing. Due to the quadrifilar helical structure, the phase centre behaviour is inherently stable across elevation angles.

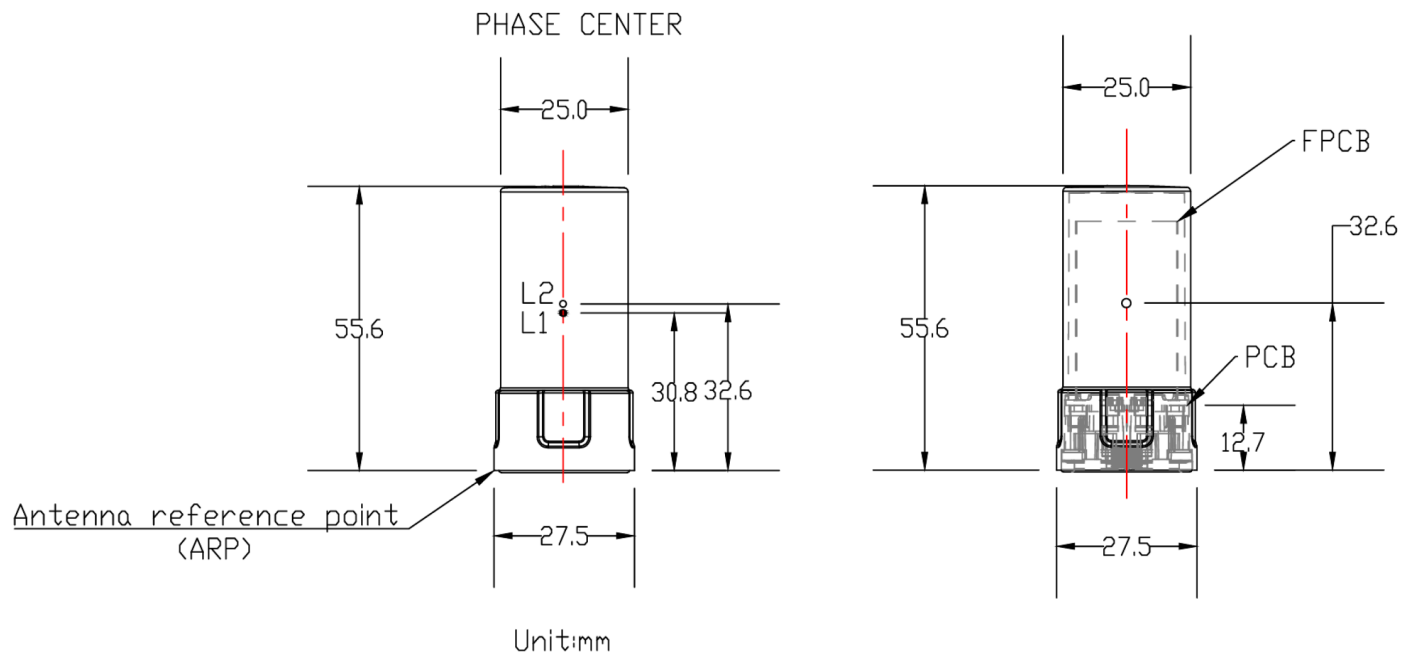

5 Packaging

Antennas packed in PE bag (1 per bag)

Bulk (units individually bagged and boxed; standard carton quantity: 50)

6 Material Regulation

The antenna has been assessed to conform to RoHS requirements. A certificate of conformance is available upon request.

Synzen Precision Technology Ltd makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Synzen reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.