
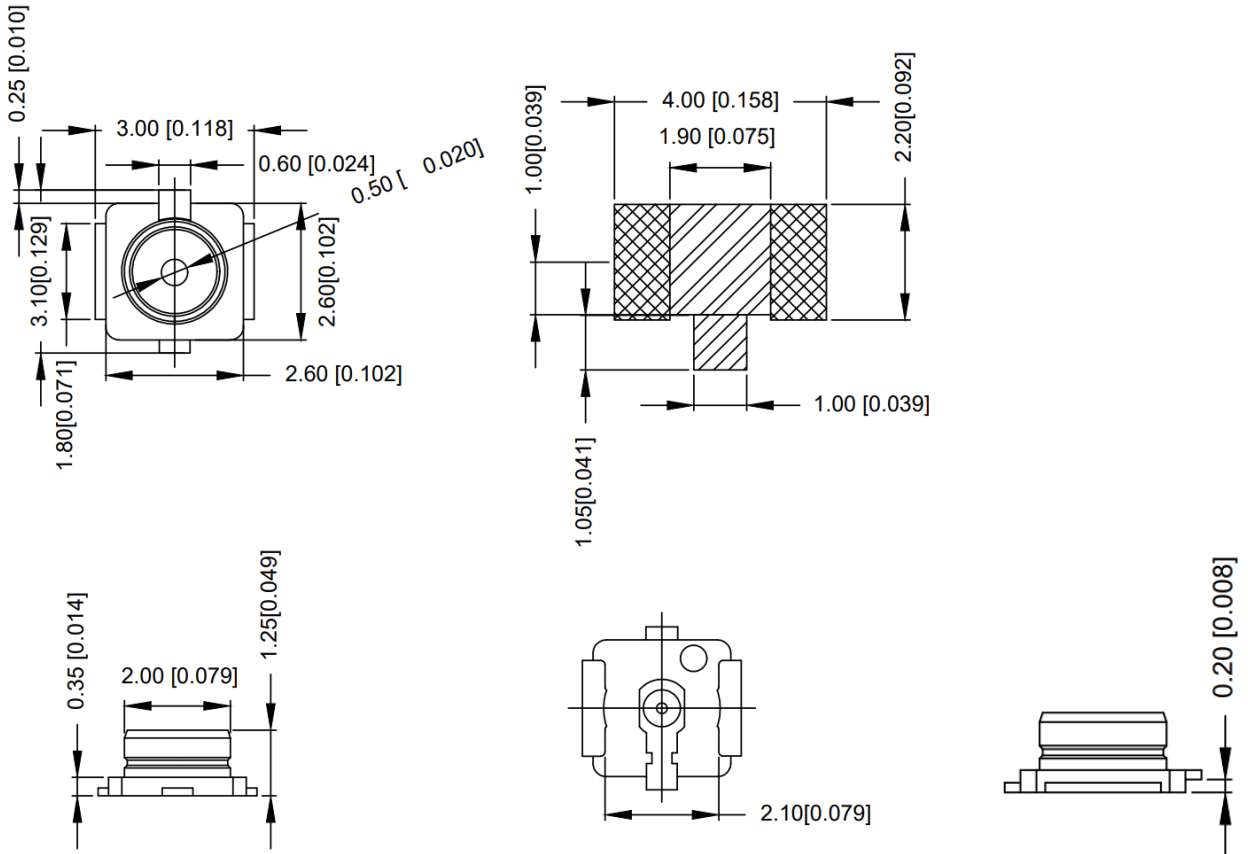


SZS-V-MHF1J



Parameters

Frequency Range : 0 - 6GHz
 Impedance : 50
 Insulation Resistance : 500M Mn
 Dielectric Withstanding Voltage : 200V AC 1Min
 Inner Contact Resistance : 20m Max
 Outer Contact Resistance : 10 m Max
 Voltage Standing wave Ratio : 1.3 Max
 Mechanical Durably : 100 Cycles
 Relative Humidity : 95 R.H.Max

Operating Temperature : -40 to 85

ECN BO.		DESCRIPTION.		DATE.	REV.	SCALE: 3:1
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER	SZS-V-MHF1J	SCALE: 1/2	X ±0.25
	RC	CDT	PART NAME		UNLESS OTHERWISE SPECIFIED, TOLERANCE:	Xx ±0.20
			MODEL NAME			Xxx ±0.15
			3RD ANGLE PROJ			ANGULAR ±3°
					FILE. NO.	

Material Regulation

The antenna has been assessed to conform to RoHS requirements. A certificate of conformance is available upon request.

Synzen Precision Technology Ltd makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Synzen reserves all rights to this document and the information contained herein. Reproduction use or disclosure to third parties without express permission is strictly prohibited.